


First class EBA shredders protect your secrets



First class quality.
Our standard.

Customers all over the world
are pleased about the durability
and well-known EBA quality.
The longer a product is used,
the more sustainable it becomes.
That is why our EBA shredders
do not have a built-in "expiry
date".

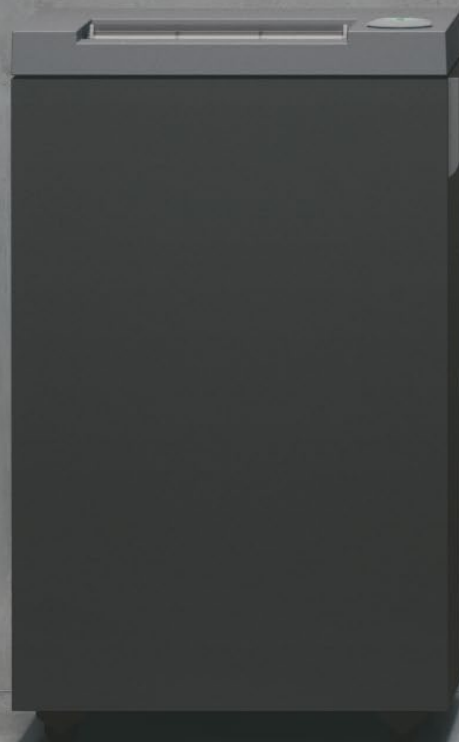

High Security. Made in Germany.

MADE IN GERMANY

SINCE 1922

Exceptional quality, reliability and innovative design are what our global customers expect of our products. Benefit from our branded quality Made in Germany supported by a certified Quality Management System according to DIN EN ISO 9001:2015. (The Shredcat models are not manufactured in Germany).

LIFETIME GUARANTEE

ON CUTTING SHAFTS

Robust and durable: the cutting heads of EBA shredders are equipped with special hardened, solid steel cutting shafts. We grant a lifetime guarantee of these high-quality cutting shafts under conditions of fair wear & tear (except fine cut, three phase and Shredcat models).

ECO

FRIENDLY

Sustainability has always played a major role in EBA's corporate philosophy. Only first-class, sustainably produced materials are built into our products. We have implemented a certified Environmental Management System according to DIN EN ISO 14001:2015 and a certified Energy Management System which proof that we care about the environment.

TOP SERVICE

QUALITY

We offer professional assistance to handle any questions or technical problems. Moreover, we guarantee that even after a device "Made in Germany" has been discontinued, spare parts will remain available for at least 15 years (from model year 2012).

ZERO ENERGY

STANDBY MODE

The environmentally-friendly energy saving function of our shredders, the ZERO ENERGY standby mode, ensures automatic and complete power cut-off after 15 minutes.

ECC

CONTROL

We set new standards in terms of quality and efficiency through innovative technologies such as the patented ECC – Electronic Capacity Control: this electronic feature indicates the used sheet capacity during shredding process to avoid paper jams. ECC+ is an improved development of the function.

EASY SWITCH

TECHNOLOGY

Ease of operation: EASY-SWITCH is an intelligent control element indicating the operational status of the shredder with varying colour codes and back-lit symbols.

EASY TOUCH

TECHNOLOGY

Easy operation is guaranteed with the EASY-TOUCH multifunction switch for stand-by / stop (off) / reverse and optical signals for the operational status of the shredder.

SPS

SAFETY

EBA shredders are particularly safe and easy to operate. In this connection, the SPS (Safety Protection System) can certainly be seen as an important milestone. SPS features include, for example, a patented, electronically controlled safety flap in the feed opening; automatic reverse and power cut-off (avoids paper jams); automatic stop if the shred bin is full; electronic door protection; double motor protection against overheating.

Shred automatically: Shredcat Auto-Feed.

No paper stress, no worries: simply load the paper, start the autofeed, and sit back and relax. Shred & Forget – paper in, problem out. The quiet, efficient motor takes care of the rest.



**GDPR
COMPLIANT**

EBA Shredcat Auto-Feed.
Compact. Quiet. Powerful.




EBA Auto-Feed Shredders. For entire stacks of paper – at the push of a button.



EBA Shredcat 8291*

Innovative, compact auto-feed shredder – shreds up to 150 sheets automatically or 8 sheets manually.

- Clear, easy-to-use control panel with LED indicators
- Automatic feeding of paper stacks up to 150 sheets (80 gsm)
- Manual feeding for up to 8 sheets (80 gsm)
- 220 mm working width
- Auto start / stop via photo cell
- Push buttons for forward / stop / reverse
- Mobile on four castors (two lockable)
- Dimensions (H x W x D): 548 x 360 x 235 mm

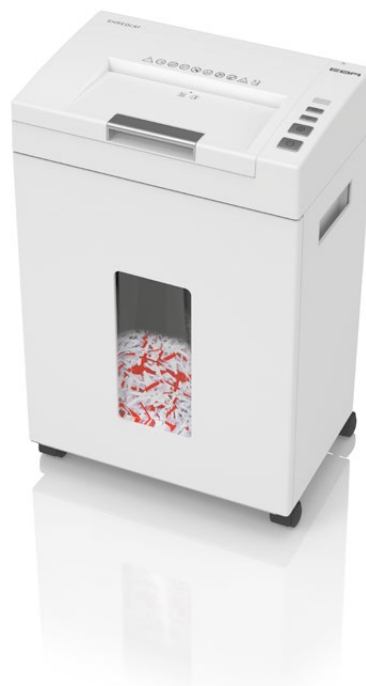





EBA Shredcat 8292

Compact auto-feed shredder – shreds up to 200 sheets automatically or 10 sheets manually.

- Clear, easy-to-use control panel with LCD display
- Automatic feeding of paper stacks up to 200 sheets (80 gsm)
- Manual feeding for up to 10 sheets (80 gsm)
- 220 mm working width
- Auto start / stop via photo cell
- Push buttons for forward / stop / reverse
- Mobile on four castors (two lockable)
- Dimensions (H x W x D): 594 x 373 x 255 mm













| Model | Shred width, mm | Shredder type | Sheet performance (A4) 70 gsm 80 gsm | Security level ISO / IEC 21964 | Shreds also | Power connection Volts / Hz | Shred bin volume | Motor capacity** W | Weight, kg |
|---------------------|-----------------|---------------|---|-----------------------------------|---|--------------------------------|------------------|-----------------------|---------------|
| EBA Shredcat 8291 C | 4 x 10 | cross cut | up to 150 | P-4 |   | 230 / 50 | 21 litres | 220 | 10,1 |
| EBA Shredcat 8292 C | 4 x 10 | cross cut | up to 200 | P-4 |   | 230 / 50 | 26 litres | 276 | 11,6 |

* Available in the first quarter of 2026

** at maximum sheet capacity



Deskside shredders



| EBA | Shredcat 8100 NEW* | Shredcat 8200 | | | 1126 | | |
|---|---|---|---|---|---|-----------|-----------|
| Model | 8100 C | 8200 S | 8200 C | 8200 C | 1126 S | 1126 C | 1126 C |
| Feed opening, mm | 220 | 220 | 220 | 220 | 220 | 220 | 220 |
| Shredder type | cross cut | strip cut | cross cut | cross cut | strip cut | cross cut | cross cut |
| Shred width, mm | 5 x 30 | 4 | 4 x 40 | 2 x 12 | 4 | 3 x 25 | 2 x 15 |
| Performance in sheets, A4 paper 70 g/m ² | 10-12 | 16-18 | 14-16 | 11-13 | 11-13 | 6-7 | 4-5 |
| Performance in sheets, A4 paper 80 g/m ² | 8-10 | 14-16 | 12-14 | 10-12 | 9-11 | 5-6 | 3-4 |
| Security ISO / IEC 21964 (DIN 66399) | P-4 | P-2 | P-4 | P-5 | P-2 | P-4 | P-5 |
| Shreds also |   |   |   |   |  | - | - |
| Paper clip proof solid steel cutting shafts | - | - | - | - | • | • | • |
| Lifetime guarantee on the solid steel cutting shafts | - | - | | | • | • | • |
|  Automatic oiler | - | - | | | - | | |
| Shred speed, m/sec. | 0.03 | 0.03 | 0.03 | 0.03 | 0.05 | 0.06 | 0.06 |
| Volume of cabinet in litres | - | - | | | - | | |
| Shred bin volume in litres | 20 | 21 | | | 20 | | |
| Power connection, volts / Hz (single phase) ¹ | 230 / 50 / 1~ | 230 / 50 / 1~ | | | 230 / 50 / 1~ | | |
| Motor capacity, W | 144** | 185** | 220** | 360** | 200 | | |
| Automatic start/stop via photo cell | • | • | | | • | | |
| Control element | rocker switch (start / stop (off) / reverse) | rocker switch (start / stop (off) / reverse) | | | EASY-TOUCH | | |
| SPS Safety Protection System: | - | - | | | - | | |
| - Patented safety flap in the feed opening | - | - | | | mechanical | | |
| - Automatic reverse / automatic power cut-off | - manual reverse | • reverse function | | | • | | |
| - Automatic cut-off if shred bin is full | - | • | | | - | | |
| - Electronic door protection (auto shut-off) | on removal of the shredder head | on removal of the shredder head | | | - | | |
| - Double motor protection | overheat protection (auto shut-off) | overheat protection (auto shut-off) | | | • | | |
| - ZERO ENERGY standby mode | - | - | | | • | | |
| Awarded the "Blue Angel" for high energy efficiency | - | - | | | • | | |
| Mobile on castors | - | - | | | - | | |
| Dimensions, mm (H x W x D) | 395 x 310 x 195 | 425 x 348 x 215 | | | 428 x 345 x 213 | | |
| Weight, kg | 4.1 | 6.8 | 7.5 | 7.5 | 6.5 | 7.5 | 7.5 |

¹ other voltages available

* Available in the 1st quarter of 2026 ** Motor rating (input), at maximum sheet performance

 credit cards
 CDs/DVDs



With optional automatic oiler.

| 1128 | | | 1624 | | | | | 1824 | | |
|-----------------|-----------|-----------|-----------------|-----------|-----------|----------|----------|-----------------|-----------|-----------|
| 1128 S | 1128 C | 1128 C | 1624 S | 1624 C | 1624 C | 1624 CC | 1624 CCC | 1824 S | 1824 C | 1824 C |
| 220 | 220 | 220 | 240 | 240 | 240 | 240 | 240 | 240 | 240 | 240 |
| strip cut | cross cut | cross cut | strip cut | cross cut | cross cut | fine cut | fine cut | strip cut | cross cut | cross cut |
| 4 | 3 x 25 | 2 x 15 | 4 | 4 x 40 | 2 x 15 | 0.8 x 12 | 0.8 x 5 | 4 | 4 x 40 | 2 x 15 |
| 11-13 | 6-7 | 4-5 | 19-21 | 13-15 | 10-12 | 4-6 | 4-5 | 22-24 | 16-18 | 11-13 |
| 9-11 | 5-6 | 3-4 | 16-18 | 11-13 | 8-10 | 3-5 | 3-4 | 19-21 | 13-15 | 9-11 |
| P-2 | P-4 | P-5 | P-2 | P-4 | P-5 | P-6 | P-7 | P-2 | P-4 | P-5 |
| | - | - | | | | - | - | ® | | |
| • | • | • | • | • | • | - | - | • | • | • |
| • | • | • | • | • | • | - | - | • | • | • |
| - | - | - | - | optional | optional | optional | optional | - | - | - |
| 0.05 | 0.06 | 0.06 | 0.07 | 0.06 | 0.06 | 0.07 | 0.07 | 0.09 | 0.10 | 0.10 |
| 20 | | | 50 | | | | | 50 | | |
| 20 | | | 35 | | | | | 35 | | |
| 230 / 50 / 1~ | | | 230 / 50 / 1~ | | | | | 230 / 50 / 1~ | | |
| 200 | | | 390 | | | | | 580 | | |
| • | | | • | | | | | • | | |
| EASY-TOUCH | | | EASY-SWITCH | | | | | EASY-SWITCH | | |
| - | | | • | | | | | • | | |
| mechanical | | | electronic | | | | | electronic | | |
| • | | | • | | | | | • | | |
| - | | | • | | | | | • | | |
| - | | | • | | | | | • | | |
| • | | | • | | | | | • | | |
| • | | | • | | | | | • | | |
| • | | | • | | | | | • | | |
| - | | | • | | | | | • | | |
| 516 x 345 x 213 | | | 635 x 395 x 291 | | | | | 635 x 395 x 291 | | |
| 10.5 | 11.5 | 11.5 | 21 | | | | | 22 | | |



The „Blue Angel“ is the first and oldest environmental seal in the world. It awards products that, viewed comprehensively, are particularly environmentally friendly and sustainable. IDEAL document shredders set the highest standards in quality, user benefits and environmental friendliness.

Office shredders



Also available with automatic oiler.




Also available with automatic oiler.


| EBA | 2127 | | | 2326 | | | | | 2331 | | | |
|--|-----------------|-----------|-----------|-----------------|-----------|-----------|----------|----------|-----------------|-----------|-----------|----------|
| Model version | 2127 S | 2127 C | 2127 C | 2326 S | 2326 C | 2326 C | 2326 CC | 2326 CCC | 2331 S | 2331 C | 2331 C | 2331 CCC |
| Feed opening, mm | 260 | 260 | 260 | 260 | 260 | 260 | 260 | 260 | 310 | 310 | 310 | 310 |
| Shredder type | strip cut | cross cut | cross cut | strip cut | cross cut | cross cut | fine cut | fine cut | strip cut | cross cut | cross cut | fine cut |
| Shred width, mm | 4 | 4 x 40 | 2 x 15 | 4 | 4 x 40 | 2 x 15 | 0.8 x 12 | 0.8 x 5 | 4 | 4 x 40 | 2 x 15 | 0.8 x 5 |
| Performance in sheets, A4 paper 70 g/m ² | 21-23 | 16-18 | 10-12 | 30-32 | 27-29 | 16-18 | 8-10 | 5-7 | 30-32 | 26-28 | 15-17 | 9-10 |
| Performance in sheets, A4 paper 80 g/m ² | 18-20 | 13-15 | 8-10 | 26-28 | 23-25 | 14-16 | 6-8 | 4-6 | 26-28 | 22-24 | 13-15 | 8-9 |
| Security ISO / IEC 21964 (DIN 66399) | P-2 | P-4 | P-5 | P-2 | P-4 | P-5 | P-6 | P-7 | P-2 | P-4 | P-5 | P-7 |
| Shreds also | | | | | | | - | - | | | | - |
| Paper clip proof solid steel cutting shafts | • | • | • | • | • | • | - | - | • | • | • | - |
| Lifetime guarantee on solid steel cutting shafts | • | • | • | • | • | • | - | - | • | • | • | - |
| Automatic oiler | - | | | - | optional | optional | optional | optional | - | optional | optional | standard |
| Shred speed, m/sec. | 0.09 | 0.10 | 0.10 | 0.08 | 0.10 | 0.10 | 0.09 | 0.09 | 0.08 | 0.10 | 0.10 | 0.09 |
| Volume of cabinet in litres | 100 | | | 125 | | | | | 140 | | | |
| Shred bin volume in litres | 75 | | | 100 | | | | | 120 | | | |
| Power connection, volts / Hz (single phase) ¹ | 230 / 50 / 1~ | | | 230 / 50 / 1~ | | | | | 230 / 50 / 1~ | | | |
| Motor capacity, W | 580 | | | 750 | | | | | 750 | 750 | 750 | 1500 |
| Automatic start/stop via photo cell | • | | | • | | | | | • | | | |
| ECC – Electronic Capacity Control | - | | | • | | | | | • | | | |
| Control element | EASY-SWITCH | | | EASY-SWITCH | | | | | EASY-SWITCH | | | |
| SPS Safety Protection System: | • | | | • | | | | | • | | | |
| – Patented safety flap in the feed opening | electronic | | | electronic | | | | | electronic | | | |
| – Automatic reverse / automatic power cut-off | • | | | • | | | | | • | | | |
| – Automatic cut-off if shred bin is full | • | | | • | | | | | • | | | |
| – Electronic door protection | • | | | • | | | | | • | | | |
| – Double motor protection | • | | | • | | | | | • | | | |
| – Zero energy standby mode | • | | | • | | | | | • | | | |
| Awarded the "Blue Angel" ² | • | | | • | | | | | • | | | |
| High quality wooden cabinet, mobile on castors | • | | | • | | | | | • | | | |
| Dimensions, mm (H x W x D) | 870 x 500 x 377 | | | 926 x 495 x 470 | | | | | 930 x 538 x 470 | | | |
| Weight, kg | 30 | 30.5 | 30.5 | 48 | | | | | 52 | | | |

¹ other voltages available


² for high energy efficiency






 With automatic oiler as standard.















 CCC with automatic oiler as standard.



 Also available with automatic oiler.



 With automatic oiler as standard.

| 5131 | | | 3240 | | | | 3340 | | | | 5141 | | | | |
|--|---|----------|---|---|---|----------|---|---|---|----------|---|---|---|----------|----------|
| 5131 C | 5131 C | 5131 CCC | 3240 S | 3240 C | 3240 C | 3240 CCC | 3340 S | 3340 C | 3340 C | 3340 CCC | 5141 S | 5141 C | 5141 C | 5141 CC | 5141 CCC |
| 310 | 310 | 310 | 400 | 400 | 400 | 400 | 400 | 400 | 400 | 400 | 405 | 405 | 405 | 405 | 405 |
| cross cut | cross cut | fine cut | strip cut | cross cut | cross cut | fine cut | strip cut | cross cut | cross cut | fine cut | strip cut | cross cut | cross cut | fine cut | fine cut |
| 4 x 40 | 2 x 15 | 0.8 x 5 | 6 | 4 x 40 | 2 x 15 | 0.8 x 5 | 6 | 4 x 40 | 2 x 15 | 0.8 x 5 | 6 | 4 x 40 | 2 x 15 | 0.8 x 12 | 0.8 x 5 |
| 40-45 | 25-30 | 12-13 | 28-31 | 22-25 | 10-13 | 4-5 | 43-45 | 34-36 | 16-18 | 8-9 | 50-55 | 40-45 | 25-30 | 15-17 | 12-13 |
| 34-39 | 21-26 | 11-12 | 24-27 | 19-22 | 8-11 | 3-4 | 37-39 | 30-32 | 13-15 | 7-8 | 42-47 | 34-39 | 21-26 | 13-15 | 11-12 |
| P-4 | P-5 | P-7 | P-2 | P-4 | P-5 | P-7 | P-2 | P-4 | P-5 | P-7 | P-2 | P-4 | P-5 | P-6 | P-7 |
|  |  | - |  |  |  | - |  |  |  | - |  |  |  | - | - |
| • | • | - | • | • | • | - | • | • | • | - | • | • | • | - | - |
| • | • | - | • | • | • | - | • | • | • | - | • | • | • | - | - |
| standard | | | - | - | - | standard | - | optional | optional | standard | standard | | | | |
| 0.15 | 0.15 | 0.15 | 0.11 | 0.08 | 0.10 | 0.15 | 0.11 | 0.08 | 0.10 | 0.15 | 0.19 | 0.15 | 0.15 | 0.15 | 0.15 |
| 180 | | | 200 | | | | 200 | | | | 210 | | | | |
| 140 | | | 165 | | | | 165 | | | | 165 | | | | |
| 230 / 50 / 1~ | | | 230 / 50 / 1~ | | | | 230 / 50 / 1~ | | | | 230 / 50 / 1~ | | | | |
| 1600 | | | 750 | | | | 1500 | | | | 1600 | | | | |
| • | | | • | | | | • | | | | • | | | | |
| • | | | ECC+ | | | | ECC+ | | | | • | | | | |
| EASY-SWITCH | | | EASY-SWITCH | | | | EASY-SWITCH | | | | EASY-SWITCH | | | | |
| • | | | • | | | | • | | | | • | | | | |
| electronic | | | electronic | | | | electronic | | | | electronic | | | | |
| • | | | • | | | | • | | | | • | | | | |
| • | | | • | | | | • | | | | • | | | | |
| • | | | • | | | | • | | | | • | | | | |
| • | | | • | | | | • | | | | • | | | | |
| • | | | • | | | | • | | | | • | | | | |
| • | | | • | | | | • | | | | • | | | | |
| 1020 x 548 x 590 | | | 945 x 640 x 550 | | | | 945 x 640 x 550 | | | | 1010 x 640 x 590 | | | | |
| 102 | | | 73 | 79 | 79 | 79 | 75 | 81 | 81 | 81 | 115 | | | | |














The „Blue Angel“ is the first and oldest environmental seal in the world. It awards products that, viewed comprehensively, are particularly environmentally friendly and sustainable. IDEAL document shredders set the highest standards in quality, user benefits and environmental friendliness.

www.blauer-engel.de/uz174




High capacity shredders




 With automatic oiler as standard.

| EBA | | 5346 | | |
|--|--|--|---|---|
| Model | | 5346 C | 5346 C | 5346 C |
| Feed opening, mm | | 460 | 460 | 460 |
| Shredder type | | cross cut | cross cut | cross cut |
| Shred width, mm | | 6 x 50 | 4 x 40 | 2 x 15 |
| Performance in sheets, A4 paper 70 g/m ² | | 85-95 | 65-75 | 35-45 |
| Performance in sheets, A4 paper 80 g/m ² | | 74-83 | 56-65 | 30-39 |
| Security level ISO / IEC 21964 (DIN 66399) | | P-3 | P-4 | P-5 |
| Shreds also | |    |    |    |
| Shredding head takes soft metal objects | | • | • | • |
| Guarantee on the cutting shafts | | 2 years | 2 years | 2 years |
| Shred speed, m/sec. | | 0.17 | | |
|  Oil injection on the cutting shafts (standard equipment) | | automatic | | |
| Shred collection in | | mobile shred bin | | |
| Capacity for shreds, litres | | 230 | | |
| Power connection, volts / Hz (three phase) ¹ | | 400 / 50 / 3P+N+PE | | |
| Motor capacity, kW | | 2.2 | | |
| Automatic start/stop via photo cell | | • | | |
| Control element | | EASY-SWITCH | | |
| Illumination of the working area | | • | | |
| Automatic reverse / automatic power cut-off | | • / • | | |
| Automatic cut-off if shred bag is full | | • | | |
| Electronic door protection | | • | | |
| Thermal overload switch | | • | | |
| Automatic standby after 30 minutes | | • | | |
| Movable on castors | | • | | |
| Dimensions, mm (H x W x D) | | 1700 x 740 x 765 | | |
| Weight, kg | | 253 | | |
| Accessories (optional): | | Modular conveyor belt system | - | |
| | | Second shred trolley | - | |


¹ other voltages available



















-  credit cards
-  CDs/DVDs
-  diskettes
-  lever arch files



 With automatic oiler as standard.



 With manual oiler as standard.

| 6340 | | | | 7050 | |
|---|---|---|---|---|---|
| 6340 S | 6340 C | 6340 C | 6340 C | 7050-2 C | 7050-3 C |
| 410 | 410 | 410 | 410 | 500 | 500 |
| strip cut | cross cut | cross cut | cross cut | cross cut | cross cut |
| 6 | 6 x 50 | 4 x 40 | 2 x 15 | 8 x 40-80 | 6 x 50 |
| 100-120 | 85-100 | 65-75 | 43-48 | 600-700 | 300-400 |
| 87-105 | 74-87 | 56-65 | 37-42 | 500-600 | 250-350 |
| P-2 | P-3 | P-4 | P-5 | P-2 | P-3 |
|    |    |    |    |    |    |
| • | • | • | • | • | • |
| 2 years | 2 years | 2 years | 2 years | 2 years | 2 years |
| 0.26 | | | | 0.21 / 0.12 (variable shred speed »2-MATIC«) | |
| automatic | | | | manual | |
| suspension for disposable plastic bags with pull-out mechanism on wheels | | | | shred trolley | |
| 300 | | | | 300 | |
| 400 / 50 / 3P+N+PE | | | | 400 / 50 / 3P+N+PE | |
| 4.0 | 3.0 | 3.0 | 3.0 | 9.0 (2 x 4.5) | |
| - | | | | - | |
| EASY-SWITCH | | | | panel with push buttons | |
| • | | | | - | |
| • / • | | | | • / • | |
| • | | | | • | |
| • | | | | • | |
| • | | | | • | |
| • | | | | - | |
| • | | | | • | |
| 1440 x 1240/690 ² x 1700 | | | | 1714 x 1036 x 2170/3070 ³ | |
| 357 | | | | 1130 | |
| - | | | | • | |
| - | | | | • | |

² transportation width (without side tables)

³ depth with conveyor belt system

www.eba.de

Valid from 2026

EBA